

Customer is responsible for providing the concrete blocks necessary for leveling the building.
 (The building will not be leveled and set directly on the ground if blocks are not provided.)

Blocking Chart


<u>Building Size</u>	<u>8" or Less Off Level</u>	<u>8" - 16" Off Level</u>
8'x8' - 10'x12'	10 - 2"	10 - 2" / 6 - 4"
10'x16' - 10'x20'	12 - 2" / 6 - 4"	15 - 2" / 10 - 4"
12'x16' - 12'x24'	15 - 2" / 12 - 4"	25 - 2" / 15 - 4"
12'x30' - 14'x24'	15 - 2" / 12 - 4"	25 - 2" / 15 - 4"
14'x32'	25 - 2" / 15 - 4"	30 - 2" / 20 - 4"

The customer is to provide a mixture of 2" and 4" thick solid concrete patio blocks for the driver to level the building. We encourage a level gravel base for buildings larger than 12'x24'. We discourage leveling with patio blocks if the building site is off level more than 20" end to end or side to side.

The driver does not carry blocks.



Skid Layouts

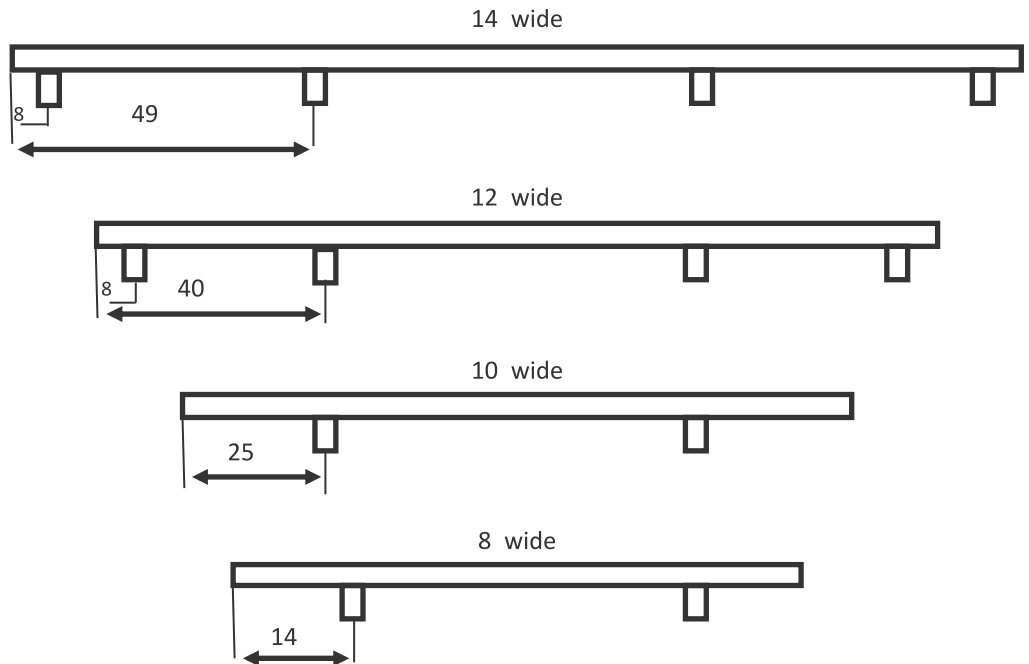

502-921-0002 / Contact us for more info on gravel pads